



**THE
SUPERMARKET
FOR SPARES.**

**AT YOUR
DOORSTEP.**

Place a call. Get your spares!



SPARES



GSTIN: 33CHYPM1218F1ZA

**I / 1 C, SIDCO Industrial Estate,
K.Pudur, Madurai - 625 007.**



0452 2433321



tnso@spares4u.in



www.spares4u.in

Authorised Distributors of :

Electricals & Electronics



Bearing

SCHAEFFLER



FAG



**Air Circulator / Exhaust Fan /
Man Cooler / PCD Products**

ALMONARD



Motors & Pumps



Smart solutions.
Strong relationships.
CG Power and Industrial Solutions

Power & Hand Tools / MHE

DEWALT
GUARANTEED TOUGH

STANLEY
PERFORMANCE IN ACTION

**Cables / Wires / Light / Fan / Water Heater/
Switches & Switch Gear**

Finolex
Cables Limited


What is Spares4U?

Spares4U brings spare parts of your choice to your doorstep. Cutting across various industries and categories Spares4U's vast inventory ensures that supply of spares is just a call away.

How does it create a difference?

Shifting market realities and information technology developments have made it important for companies to remain effective in performance. Sourcing ideal spare parts is an important component of this.

Spares4U removes the trouble of scouting and sourcing for parts, by bringing them to your doorstep!

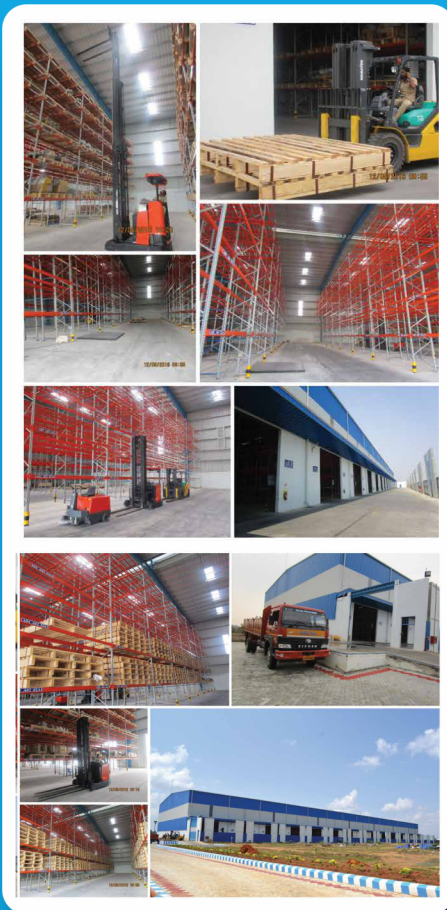

Scaled up to serve better

As befits a business that caters to numerous industries, Spares4U possesses a spacious inventory - with storage space of 1.47 lakh sq.ft., and 28 storage bays of 60 racks each. Transportation is taken care of thanks to trucks of 10 to 4 ton capacities. Other Facilities include Dock ,leveler, Jib Crane and 3 Ton capacity weighing scale.



All Electrical & Electronics

Low Voltage Products and Systems

- **Circuit Breakers and Switches**
- **ACB's:** 630A to 6300A with different breaking capacity and Micrologic based release (Masterpact MTZ/NT/NW, Easycompact SPS/MVS)
- **MCCB's:** 16A to 3200A with different breaking capacity and protection release (Compact NSXm/NSX/NS, Easycompact CVS/EZC/NKS)
- **SDF:** Fupact from 32A to 630A
- **Switch Disconnectors- Compact- INS & INV:** 40A to 2500A

Contactors and Protection Relays

- **EasyPact TVS-** The Easy choice for simplicity and flexibility: 6A to 630A Contactors, 0.1A to 630A Over Load Relays, 0.1A to 32A MPCB's and accessories
- **Tesys Range-** Contactors from 6A to 2750A, Relays, MPCB's, Switch Disconnectors Capacitor Duty Contactors: upto 60kVAR

Advanced Motor Protection Components

- **TeSys H** - Ultra-compact starters: The most compact 3 KW / 400 V starter in the world
- **EOCR-** Electronic Over Current Relays: Suitable for motors upto 400A
- **EOLR-** Electronic Over Load Relays: 0.1A to 32A
- **New TeSys GV4:** Compact and Robust, covering motors upto 55kW- Breaking capacity upto 100kA
- **TeSys U-** Total Coordinated Starter: upto 32A
- **Tesys T Motor Management Systems- IMCC:** Intelligent motor controller for 1P/3P Motors with built in CT up to 100Amps with accurate monitoring and protection functions, 6DI, 4DO, 1CBCT input, 1 Temperature probe

Power Monitoring Devices

- **Basic Meters:** DM3000/DM1000- Ammeters and Voltmeters
- **LCD Display Energy Meter & VAF+PF Meter:** EM1000/EM1200/DM6100
- **Specialized Counter Energy Meter** - DM52xx Series
- **Specialized Small Form Factor Meters** - ELF Series
- **DIN Rail Mount Meters - Accurate, Flexible Power Meters:** Powerlogic PM3200/EM3000
- **India's Most Trusted, Reliable and Accurate Multifunction Meters:** Hexa Series EM64XXH and PM1130H Meters & Conzerv EM6400NG Series, The Next Generation Workhorse
- **High Accuracy, Compact, Power Meters:** PM5000/PM2000/EM7200
- **High Accuracy, Specialized Solutions:** ION9000/ION8800/8650/PM8000 Ethernet Communication Gateways and Meters
- **EMS Solutions:** Power Monitoring Expert/Power Scada Expert

Power Quality and Power Factor Correction Products

- **LV Capacitors:** Available in standard duty, heavy duty, APP, Gas Impregnated and Energy (MDXL) - Can & Box designs

- **APFC Relays:** Comprehensive range with 6/8/12 stages
- **Detuned Reactor:** Low loss design LV APFC Panel
- **Active Harmonic Filters:** Performance better than IEEE 519-1992

Final Distribution Products

- **MCB's:** 0.5 to 125 A in B,C & D curves with breaking capacity from 10 kA to 50 kA
- **RCD's:** RCCBs, RCBOs, Vigi Add on blocks upto 125A in AC and Si class
- **SPD's:** Type 1 and Type 2
- **DB's:** Metal Enclosures, SPN, TPN, PPI, Flexi Tier, VTPN, Phase Segregated DBs

Modular Switches and Home Automation

- **Livia** – switch to the extra ordinary
- **Opale** – Switches with satin finish
- **ZENcelo** – be in-standing
- **Neo** – face the future
- **Ulti** – The ultimate switch

Bus Way Solutions (Sandwich and Air Insulated Type Bus Ducts and Accessories)

- **I LINE II Copper High Power** Sandwich Busway (800A to 6000A)
- **I LINE II Copper Contact/Aluminum High Power** Sandwich Busway (800A to 5000A)
- **Canalis** - Low and Medium Power Busway (40A to 800A)
- **Canalis** - Lighting Busway (20A, 25A and 40A) Industrial Automation Products

Industrial Automation Products

Variable Speed Drives (VFD)

- **Altivar12 Drive:** 1-Phase / 3-Phase 230 Volts Input & 3-Phase 230 Volts Output Drive upto 4 kW
- **Altivar310 Drive:** 3-Phase 440V Input & 3-Phase 440 Volts Output Drive 11 kW
- **Altivar610 Drive:** for pumps and fans from 0.75 to 160 kW
- **Altivar212 Drive:** for HVAC, 3-phase asynchronous motors from 0.75 to 75 kW
- **Altivar320 Drive:** for synchronous and asynchronous motors from 0.18 to 15 kW
- **Altivar340 drive:** with innovative variable speed drives for high-performance machines upto 75kW
- **Altivar 71 drive:** Drives for three-phase motors from 0.37kW to 500kW
- **Altivar Process ATV630** : Variable Speed IIOT Drive dedicated to process Industry and Utilities (Pump & Fan) from 0.75 kW to 315 kW.
- **Altivar Process ATV930:** Variable speed drives dedicated to constant torque application with excellent motor control and connectivity capabilities (0.75kW to 315kW)

Soft Starters

- **ATS01 Soft Start** – Soft Stop Unit upto 15kW
- **ATS22 Soft Starter:** Soft Starter for Utilities i.e. Pump & fan upto 315kW
- **ATS48 Soft start-** Soft stop units for 3-phase asynchronous motors from 4 to 1200 kW
- PLC and SCADA Systems
- HMI
- Servo Motors
- Proximity Sensors
- Power Supplies: Phaseo from 1.5A to 40A
- Complete range of Pushbuttons, Indication Lamps, Selector Switches and Joysticks
- Pendant Stations
- Plug in Relays

Medium Voltage Products

- Power and Distribution Transformers
- Medium Voltage Switchgear and Panels (VCB, GIS, RMU, PSS etc)
- Protection Relays (Micom, SEPAM, VAMP etc)

SCHAEFFLER
INA
FAG



Bearings

- **Angular Contact Ball Bearings** Single-row angular contact ball bearings are self-retaining units with solid inner and outer rings and ball and cage assemblies with polyamide, sheet metal or brass cages. The raceways of the inner and outer rings are offset from each other along the bearing axis. The bearings are available in open and sealed designs. Their angular adjustment facility is very limited. Double-row angular contact ball bearings can support axial loads in both directions and high radial loads. They are particularly suitable for bearing arrangements in which rigid axial guidance is required
- ★ **Angular Contact ball bearing** ★ **Double-row angular Contact Ball Bearing** ★ **Axial angular Contact ball bearings**
- **Barrel Roller bearing** Barrel roller bearings are single-row, self-aligning roller bearings. They comprise solid outer rings with a concave raceway, solid inner rings with two ribs and a cylindrical or tapered bore as well as barrel rollers with cages. The bearings cannot be dismantled. Barrel roller bearings are particularly suitable where high radial shock type loads occur and misalignments must be compensated; see section on compensation of angular misalignments. They have only a low axial load-carrying capacity.
- **Crossed roller bearing (INA)** Crossed-roller bearings are bearings for high-precision applications whose dimensions conform to ISO dimension series 18 as per DIN 616. They comprise outer rings, inner rings, rolling elements and plastic spacers. The outer ring is split and is held together by three retaining rings.
- **Deep groove ball bearings** Single-row deep groove ball bearings are available in open and sealed designs. They are designed for high to very high speeds and can accommodate radial as well as axial forces.
- **Axial deep groove ball bearings** FAG axial deep groove ball bearings are available in single or double-direction design variants. These bearings are especially well suited to high axial loads.
- **Four point contact ball bearings** Four-point contact bearings are single-row angular contact ball bearings and therefore require significantly less space in an axial direction than double-row designs
- **Thin Section bearing (INA)** Thin-section bearings are high-precision products with very little running noise and a high load-carrying capacity
- **Rotary table bearings (INA)** Axial-radial bearings are double-direction axial bearings for screw mounting with a radial guidance bearing. These ready-to-fit, pregreased units are very rigid, have high load-carrying capacity and operate with particularly high accuracy.
- **Radial insert ball bearings (INA)** Radial insert ball bearings are single-row, ready-to-fit units comprising a solid outer ring, an inner ring extended on one or both sides, cages made from plastic or sheet steel and seals of type P, R, L or T. Bearings with an inner ring extended on both sides undergo less tilting of the inner ring and therefore run more smoothly.
- **Maintenance-free plain bearings (INA)** Schaeffler offers a comprehensive catalog of maintenance-free plain bearings. Innovative plain bearing materials are used here, such as ELGOGLIDE, ELGOTEX, and the metal-polymer composite E40. These PTFE plain bearing materials enable ultra-low coefficients of friction for spherical plain bearings and rod ends as well as bushes, washers and strips while ensuring low wear and very long life cycles. Maintenance-free plain bearings considerably reduce lubricant and maintenance costs as they do not require any oil or grease while also being very environmentally friendly.

- ★ **Radial spherical plain bearings with ELGOGLIDE** ★ **Angular Contact Spherical plain bearings with ELGOGLIDE** ★ **Axial spherical plain bearings with ELGOGLIDE** ★ **Rod ends with ELGOGLIDE** ★ **Plain bushes with ELGOGLIDE** ★ **Metal/Polymer composite plain bearings** ★ **Plain bearings with ELGOTEX**

• Needle Roller Bearings (INA)

Needle roller bearings have a long track record as proven machine elements for the design of radially compact bearing arrangements with very high load-carrying capacity. In X-life configuration, they now have an up to 50 % longer service life.

- ★ **Machined needle roller bearings** ★ **Needle roller and cage assemblies** ★ **Drawn cup needle roller bearings with open ends** ★ **Drawn cup needle roller bearings with closed ends** ★ **Aligning needle roller bearings** ★ **Inners rings** ★ **Axial needle roller bearings** ★ **Drawn-cup roller clutches**

• Spherical Roller Bearing

Delivering an outstanding performance: Spherical roller bearings are designed for systems in which high loads must be supported and shaft flexing and misalignments compensated. They deliver extremely high performance and are designed to carry extreme loads

- ★ **Spherical roller bearing** ★ **Swivel-joint roller bearing for vibration machines** ★ **Split spherical roller bearings** ★ **Axial spherical roller bearings** ★ **Sealed spherical roller bearings**

- **Tapered Roller Bearing** FAG tapered roller bearings can support high radial and axial loads. They have a broad range of speeds. They are efficient at supporting forces and ensure a precise and rigid shaft guidance system due to the large effective distance between the bearings. Tapered roller bearings can be adjusted and dismantled, which makes mounting easy

- ★ **Single row tapered roller bearings** ★ **Double row tapered roller bearings** ★ **Four row tapered roller bearings** ★ **Axial tapered roller bearings**

- **Cylindrical Roller Bearing (FAG / INA)** Single-row cylindrical roller bearings with cage are units comprising solid inner and outer rings and cylindrical roller and cage assemblies. The outer rings have rigid ribs on both sides or no ribs, and the inner rings have one or two rigid ribs or are designed without ribs. The cage prevents the cylindrical rollers from coming into contact with each other during rolling. Cylindrical roller bearings can be supplied with or without a cage

- ★ **Cylindrical roller bearing with cage** ★ **Axial cylindrical roller bearing** ★ **Low-friction cylinder roller bearings** ★ **High-precision cylindrical roller bearing** ★ **Full-complement cylindrical roller bearing** ★ **Full Complement cylindrical roller bearing with snap ring grooves**

- **Bearings Housing** Our standard housings encompass split and unsplit plummer block housing designs. With split plummer block housing designs, the upper part of the housing can be removed. This greatly simplifies assembly and maintenance. Unsplit plummer block housings are used in applications that place extremely high demands on bearings

- ★ **Bearing House** ★ **SNS plummer block housing**

- **Belt tension pulleys (INA)**

- ★ **Idler pulley units are tensioning systems for belt drives and idler units. They increase the wrap angle in belt drives and can therefore support higher power levels or allow smaller units to be used to compensate for belt stretch resulting from operation** ★ **Allow shorter center distances** ★ **Reduce the wear on the belt drive**

- **Housing Units (INA / FAG)** Radial insert ball bearings and housing units are robust, ready-to-fit machine elements for the design of economical bearing arrangements. These products have proven effective over many years and are available in many different series. They predominantly comprise a radial insert ball bearing fitted in a housing.

- ★ **Reduce the wear on the belt drive** ★ **INA radial insert bearing housing units i.a.w DIN** ★ **FAG radial insert bearing housing units i.a.w JIS**

ALMONARD



ALMONARD



Industrial Air Circulator

Air Circulator – Wall Mounting

- Tempest Mark II - 450MM (18")
- Tempest -450MM (18")
- Heavy Duty - 600MM (24 ")
- Heavy Duty - 750MM (30")

Air Circulator – Pedestal

- Tempest Mark II - 450MM (18")
- Tempest -450MM (18")
- Heavy Duty - 600MM (24 ")
- Heavy Duty - 750MM (30")

Mancooler : - Wall Mounting or Brackets / Pedestal / Tubular

- 450mm (18") 0.5 HP/ 1370 RPM
- 450mm (18") 2.0 HP / 2810 RPM
- 600mm (24") 0.75 HP / 1400 RPM
- 750mm (30") 2.0 HP / 1400 RPM
- 900mm (36") 2.0 HP / 920 RPM
- 900mm (36") 3.0 HP / 1400 RPM
- 1200mm (48") 7.5 HP / 950 RPM

Heavy Duty – Exhaust Fan

- 300mm (12") 90 W / 1400 RPM / SINGLE PHASE
- 300mm (12") 55 W / 900 RPM / SINGLE PHASE
- 380mm (15") 160W / 1400 RPM / SINGLE PHASE
- 380mm (15") 160W / 1400 RPM / THREE PHASE
- 380mm (15") 100 W / 900 RPM / SINGLE PHASE
- 380mm (15") 100 W / 900 RPM / THREE PHASE
- 450mm (18") 410W / 1400 RPM / SINGLE PHASE
- 450mm (18") 360W / 1400 RPM / THREE PHASE
- 450mm (18") 145 W / 900 RPM / SINGLE PHASE

- 450mm (18") 145 W / 900 RPM / THREE PHASE
- 600mm (24") 250W / 700 RPM / SINGLE PHASE
- 600mm (24") 240W / 700 RPM / THREE PHASE
- 600mm (24") 500W / 900 RPM / SINGLE PHASE
- 600mm (24") 500W / 900 RPM / THREE PHASE
- 750mm (30") 900 W / 900 RPM / SINGLE PHASE
- 750mm (30") 900 W /900 RPM / THREE PHASE
- 900mm (36") 1200 W / 700 RPM / THREE PHASE

Air Vent Exhaust Fan

- 230mm (9") 45 W / 1400 RPM / SINGLE PHASE
- 300mm (12") 75 W / 1350 RPM / SINGLE PHASE

Air Curtains

2 Meters Air Flow :

- AHV-2 Feet / AHV-3 Feet / AHV-1Mtr / AHV-4 Feet / AHV-5 Feet / AHV -6 Feet / AHV-2Mtr

2.5 Meters Air Flow :

- AEHV-2 Feet /AEHV-3 Feet /AEHV-1 Mtr /AEHV- 4 Feet/AEHV-5 Feet /AEHV -6 Feet /AEHV-2 Mtr

3.5 Meters Air Flow :

- AIB-3 Feet /AIB-1Mtr /AIB-4 Feet /AIB-5 Feet /AIB -6 Feet /AIB-2 Mtrs

PCD Equipments

- Gravity Dust Collector
- Cyclone Dust Collector
- Low Ratio Fabric Dust Collector
- High Ratio Pulsejet Fabric Dust Collector
- Unit Dust Collector

Air Pollution Control Systems

- Duct Mounted Axial Flow Fan
- Wall Mounted Axial Flow Fan
- Belt Driven Axial Flow Fan
- Variable Pitch Axial Flow Fan
- Roof Extractor
- BI- Furcated Axial Flow Fan



Smart solutions.
Strong relationships.
CG Power and Industrial Solutions



Apex Series Aluminium Construction Motor:

- Output -0.75 Kw to 7.50 Kw
- Frame – 80 to 132
- Poles – 2 ,4,6
- Type - Foot / Flange Mounted

Apex Series Cast Iron Construction Motor

- Output -0.75 Kw to 250 Kw
- Frame – 80 to 355
- Poles – 2 ,4,6
- Type - Foot / Flange Mounted

Apex Series Flame Proof Motor (Cast Iron Frames)

- Output -0.75 Kw to 275 Kw
- Frame –E80 to E355
- Poles – 2 ,4,6
- Type - Foot / Flange Mounted

IE2 – Foot Mounted

- Out Put – 0.37 Kw to 375 Kw
- HP – 0.50 to 500
- Frame - GD 71 to ND355LX
- Pole/ RPM – 2/3000 , 4/1500 ,6/1000

NEMA Motors

- Output – 0.75 Kw to 75 Kw
- HP -1.00 to 100
- Frame – 143T to 405TS
- Pole/ RPM – 2/3000, 4/1500 , 6/1200

IE2 – FLAME PROOF FOOT MOUNTED

- Output – 0.37 Kw to 250 Kw
- HP -0.50 to 335
- Frame – E80 to E355LX
- Pole/ RPM – 2/3000, 4/1500 , 6/1000

IE3 – FLAME PROOF FOOT MOUNTED

- Output – 0.37 Kw to 250 Kw
- HP -0.50 to 335
- Frame – E80 to E355LX
- Pole/ RPM – 2/3000, 4/1500 , 6/1000

SLIPRING MOTORS

- Output – 2.20 Kw to 350 Kw
- HP -3.00 to 470
- Frame – DW132S to NDW400LX
- Pole/ RPM – 4/1500, 6/1000 , 8/750

SPDP SLIPRING

- Output – 3.70 Kw to 350 Kw
- HP -5.00 to 470
- Frame – CW160M to CW355L
- Pole/ RPM – 4/1500, 6/1000 , 8/750

SPDP SQUIRREL CAGE

- Output – 7.5 Kw to 250 Kw
- HP -10.00 to 335
- Frame – C160M to C315MX
- Pole/ RPM – 2/3000, 4/1500, 6/1000, 8/750

CRANE DUTY –SCR

- Output – 0.25 Kw to 45 Kw
- HP -0.33 to 60
- Frame – GD63 to ND225M
- Pole/ RPM – 4/1500 , 6/1000, 8/750

CRANE DUTY –SLR

- Output – 1.10 Kw to 116 Kw
- HP -1.50 to 156
- Frame – DW112M to NDW315M
- Pole/ RPM – 6/1000 , 8/750, 10/600

TEXTILE MOTORS – LOOM/ WEAVING

- Output – 0.75 Kw to 1.50 Kw
- HP -1.00 to 2.00
- Pole/ RPM – 6/1000, 8/750

TEXTILE MOTORS – CARDING

- Output – 0.75 Kw to 1.50 Kw
- HP -1.00 to 2.00 • Pole/ RPM – 6/1000

TEXTILE MOTORS – GINNING

- Output – 2.20 Kw to 7.50 Kw
- HP -3.00 to 10.00 • Pole/ RPM – 4/1500

TEXTILE MOTORS – CONE WINDING

- Output – 3.70 Kw & 5.50 Kw
- HP -5.00 & 7.50 • Pole/ RPM – 6/1000

BRAKE MOTORS (Kibosh Brake Motor)

- Output –0.37 Kw & 45 Kw
- HP -0.50 to 60
- Frame –NG80 to ND225M
- Pole/ RPM – 4/1500, 6/1000, 8/750

PUMPS

Slow Speed Self Priming Pump

Applications : High raise building , Small Farm House, Hospitals, Gardening , Flats and Booster application etc...

- KW-0.37, 0.75 • Hp- 0.5 , 1 • RPM-1425

Shallow Well JET Pumps

Applications : Small farms, Buildings, Apartments , Hotels, Clubs, Gardening Etc....

- KW-0.37, 0.75 • Hp- 0.5 , 1 • RPM-2850

High Speed Self Priming Pumps

Applications: Water supply to overhead tank of Bungalow, Residential Buildings, Flats, Hotels, Hospitals, Lawns Sprinklers, Nursing Homes etc...

- KW-0.37, 0.75, 1.1 • Hp- 0.5, 1 ,1.5 • RPM-2850

High Speed Super Suction Self Priming Pumps

Applications : Clear Water Supply to over head tanks of High rise building , Residential Buildings, Flats, Hotels, Nursing Homes, Car Washing

- KW-0.37, 0.75, 1.1 • Hp- 0.5, 1, 1.5 • RPM-2850

Domestic Open Well Pumps

Applications : Water supply to overhead tank of Bungalow, Residential Buildings , Flats , Hotels, Hospitals, Lawns Sprinklers, Nursing Homes etc...

- KW-0.37, 0.75 , 1.1, 1.5 • Hp- 0.5 , 1 ,1.5 , 2 • RPM-2850

Centrifugal Mono Block Pump Set

Applications : Small Farm House, Hospitals, Irrigations , Flats and Apartments etc..

- KW-0.37, 0.75 , 1.5 • Hp- 0.5 , 1 ,2 • RPM-2850

Self Priming Pressure Booster Pumps

Applications : For pressurized water, Washroom showers

- Hp- 0.5 , 1 • RPM-3000

Vertical Submersible Pump Set (V3 & V4)

Applications : Drinking water supply for Domestic and Community , Irrigation and Drip Irrigation, Gardening, Farm Irrigation, High Storey Buildings , Industrial Water Supply, Construction site and Hotels etc...

V3-80mm -Copper Rotor

- KW – 0.75, 0.37, 0.95,
 - Hp- 0.5 , 0.75, 1.0, 1.25,
- No of Stage -9, 10, 12, 14, 16, 19, 24,

V4-100mm -Copper Rotor

- KW – 0.75, 1.10, 1.50
 - Hp- 0.5 , 0.75, 1.0, 1.50,2
- No of Stage -7, 8, 10, 12, 14, 16, 18, 21, 25, 32, 40

DEWALT
GUARANTEED TOUGH

STANLEY



Power / Hand Tools

POWER TOOLS

CONSTRUCTION

- SDS Plus Hammer
- Combi Hammer
- Demolition Hammers
- Chipping Hammer
- Demolition Breaker
- Tile Saw
- Alligator Saw
- Wet Drilling Motors

DRILLS & FASTENING

- Screwdrivers
- Impact Drivers
- Impact Wrenches
- Impact Drill Driver
- Impact Hammer Drill

METAL WORKING

- Angle Grinders
- Die & Straight Grinders
- Magnetic Drill
- Sander & Polisher
- Bandsaw
- Heavy duty chop saw
- Bench Grinder

WOOD WORKING

- Orbit Sander
- Portable Planer
- Pendulum jigsaw
- Bevel Mitre saw
- Reciprocating Saw
- Compact Circular Saw
- Lightweight Table Saw
- Router

CORDLESS

- Activated Screw Driver
- Screw Driver Kit
- Compact Drill / Driver
- Hammer Drill Driver
- Angle Drill Driver
- Angle Grinder
- Impact Driver
- Impact wrench
- SDS Plus Hammer
- Concrete Nailer
- Finish Nailer
- Die Grinder Brushless
- Battery Pack
- Compact Charger
- Battery

SPECIALITY

- Heat Gun
- Heavy Duty Industrial Blower
- Dust Extractor –WET / DRY
- Surface Grinding Shroud

Pressure Washer

- Professional Pressure Washer
- Semi Pressure Washer

HAND TOOLS

- Spanners & Sets
- Fastening Tools
- Sockets & Accessories
- Mechanics Tool Sets
- Automotive Tools Kits
- Torque Wrenches
- Pliers
- Pipe Tools

- Cutting Tools
- Measuring & Layout Tools
- Work Holding
- Striking Tools
- Speciality Tools
- Tools Storage

ACCESSORIES

- Bonded Abrasives
- Grinding Wheels
- Cutting Wheels
- Chop Saw Wheels
- SDS Plus Drill Bits
- SDS Max Drill Bits
- Demolition Chisels
- Annular Cutters
- Diamond Core Bits
- Saw / Tile Cutting Blades
- Wire Brushes
- Flexvolt Accessorirs
- Metal HSS Drill Bits
- SDS Plus Hammer Drill Bits
- Chisels
- Circular Saw & Mitre Saw Blades
- TURBO Grinding Wheels

POWER TOOLS SPARE PARTS

- Armature
- Bearing
- Lock Button
- Baffle
- O Ring
- Toggle Switch
- Brush Pair
- Spring
- Sleeve
- Contact Plate

Hand Trucks , Multi Trucks & Platform Carts

- Folding hand truck with Basket Clip
- Folding Basket
- Folding Platform Truck
- Steel Folding Hand Truck
- Steel Platform Truck - 300Kgs
- Aluminum Hand Truck -200 Kgs

PalletTrucks, Stackers & Table Lifters

- Pallet Truck-2500 kgs Short
- Pallet Truck -1500 Kgs Long XL
- Scissor Pallet
- Manual Stacker-1000 Kg
- Table Lifter-800 Kgs

Brand - Product Portfolio

STANLEY

PROTO

DEWALT

IRWIN

BLACK+DECKER

TM

LENOX

FACOM

Finolex
Cables Limited



All Electrical Materials

Wires Coil & Winding Wire

- 45, 90 & 180 Meters Coil – FR & FRLS
- 90 & 180 Meters Coil- Halogen Free Flame Retardant
- PVC Insulated Winding Wire – Dia 0.60mm -3.00mm

Solar DC Cables

- 100 Meters Coil – 4 Sqmm & 6 Sqmm

Communication Cables

- CCTV Cables
- Telephone Cables
- Network Cables
- TV Cables
- Speaker Cables
- Optical Fiber Cables

Flexible Cables

- 3 Core Flat Submersible Cables -
1.50 Sqmm to 95.00 Sqmm
- Flexible – Single Core to 19 Core -
0.50 Sqmm to 4.00 Sqmm
- Flexible - Single Core Heavy Duty -
6.00 Sqmm to 240 Sqmm
- Flexible - 3 & 4 Core round sheathed Heavy Duty -
6.00 Sqmm to 120 Sqmm

LV-Aluminum Armoured Cables

- 1 Core – 16 Sqmm to 1000 Sqmm
- 2 Core – 4 Sqmm to 16 Sqmm
- 3 Core – 4 Sqmm to 400 Sqmm
- 3.5 Core -25 Sqmm to 400 Sqmm
- 4 Core – 4 Sqmm to 400 Sqmm

LV -Aluminum UNArmoured Cables

- 1 Core – 16 Sqmm to 1000 Sqmm
- 2 Core – 4 Sqmm to 16 Sqmm
- 3 Core – 4 Sqmm to 400 Sqmm
- 3.5 Core -25 Sqmm to 400 Sqmm
- 4 Core – 4 Sqmm to 400 Sqmm

LV-Copper Armoured Cables

- 1.5 Sqmm – 2 Core to 61 Core
- 2.5 Sqmm – 2 Core to 61 Core
- 2 Core – 4 Sqmm to 16 Sqmm
- 3 Core -4 Sqmm to 16 Sqmm
- 4 Core – 4 Sqmm to 70 Sqmm

LV-Copper UNArmoured Cables

- 1.5 Sqmm – 2 Core to 61 Core
- 2.5 Sqmm – 2 Core to 61 Core
- 2 Core – 4 Sqmm to 16 Sqmm
- 3 Core -4 Sqmm to 16 Sqmm
- 4 Core – 4 Sqmm to 16 Sqmm

HV- Aluminum Flat Armoured 3 Cores Cables

- 6.6 KV (E) – 70 Sqmm to 400 Sqmm
- 11 KV (E) – 35 Sqmm to 400 Sqmm
- 11 KV (UE) -95 Sqmm to 400 Sqmm
- 22 KV (E) – 95 Sqmm to 400 Sqmm
- 33 KV (E) – 95 Sqmm to 400 Sqmm

Lights

- LED Bulb – 3 Watts to 46 Watts
- LED T5 Fixture – 5 Watts to 18 Watts
- Slim – Round & Square Panel - 6 Watts to 24 Watts
- Flat – Round & Square Panel -6 Watts to 24 Watts
- Surface Round & Square Panel -15 Watts to 24 Watts
- Down Light
- Track Light
- 2 x2 Panel Light

Fan

- Ceiling Fan
- Wall Mounting
- Exhaust Fan
- Pedestal Fan
- Table Fan

Water Heater

- Storage Water Heater -Ltrs Capacity - 10,15 & 25 Liters
- Instant Water Heater – Ltrs Capacity - 1 , 3 Liters

Switch & Accessories and Switch Gear

- Metal Box
- Cover Plate
- Switches
- Bell Push
- Socket
- Light Dimmer
- Fan Regulator
- Distribution Board
- Surface Box
- MCB, MCCB , RCCB

Brand - Product Portfolio



SPARES



📍 I / 1 C, SIDCO Industrial Estate, K.Pudur,
Madurai - 625 007.

☎ 0452 2433321

✉ tns0@spares4u.in 🌐 www.spares4u.in

We Cover : Madurai | Trichy | Dindigul | Sivagangai | Ramanathapuram | Virudhunagar | Theni | Tirunelveli | Tuticorin | Kanyakumari